


Cable glands > Stainless steel > IP68 cable glands

Type: 7900A.M12

Family: 7900A M

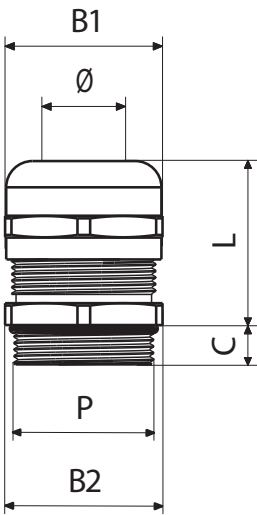

MAXIINOX CABLE GLAND, IN AISI 316L STAINLESS STEEL, M12X1,5, IP68

Technical info	
Range of operating temperature (static)	-40÷100 °C
Range of operating temperature (dynamic)	-25÷100 °C
Color	steel
Thread pitch	M12x1.5
Counter nut	No
External seal	Yes
Internal washers	No
Tightening torque	6 Nm
Range of length of total entry bush dimensions (L)	16÷20 mm

Weight and dimensions	
Spanner size for tightening the entry bush (B1)	16 mm
Spanner size for tightening the body (B2)	16 mm
Fixing hole diameter	12.2 mm
Width	18 mm
Length of the thread on the side of the insertion into the panel (C)	6.5 mm
Range of cable housing diameter	3÷7 mm

Material treatment and composition	
Body material	stainless steel AISI 316L
Cage material	Polyamide PA6.6
Entry bush material	stainless steel AISI 316L
Outer seal material	Nitrile 70 sh A
Inner seal material	Neoprene
Halogen free	No

Certifications and approvals	
Marks	CE; UKCA
Ingress Protection IP according to CEI EN 60529	IP68
ROHS	Yes
REACH	Yes
Glow wire test	No
Reference standard	CEI EN 60423;CEI EN 62444

Logistics	
Minimum unit quantity	20
Standard unit quantity	60