


Cable lugs > Pre-insulated > End sleeves

Type: PKC120027

Family: PKC

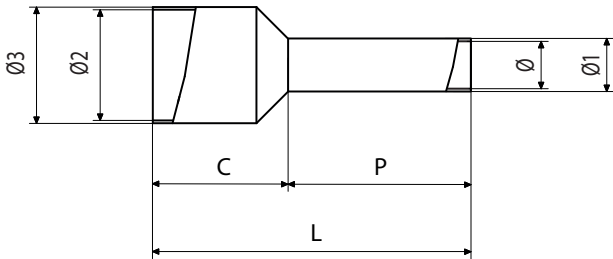

END SLEEVE, PRE-INSULATED WITH PA6, BLUE, FOR FLEXIBLE COPPER CONDUCTORS, SECTION 120MMQ P=27MM

Technical information	
Maximum operating temperature	105 °C
Minimum operating temperature	-20 °C
Cable section range	120÷120 mm²
Colour of jacket	Blue
Compatible cable class	5 class
Cable stripping length	27 mm
Easy entry	Yes
Dielectric strength of the insulating jacket	16.5 kV/mm
Type	single

Weight and dimensions	
Bow external diameter (Ø3)	21.4 mm
Bow internal diameter (Ø2)	20 mm
Tube external diameter (Ø3)	17.6 mm
Tube total length (L)	48 mm
Tube body length (P)	27 mm
Sleeve length (C)	21 mm

Material composition and treatments	
Halogen-free	Yes
Insulating jacket material	Polyamide
Conductor body material	Electrolytic copper with purity above 99,95%
Annealed	Yes
Conductor body surface treatment	tin plating
Minimum thickness of conductor body surface treatment	3 µm

Certifications and approvals	
REACH	Yes
ROHS	Yes

Logistics	
Minimum packaging unit	25
Standard packaging unit	75