


Cable lugs > Pre-insulated > End sleeves

Type: PKC70022

Family: PKC

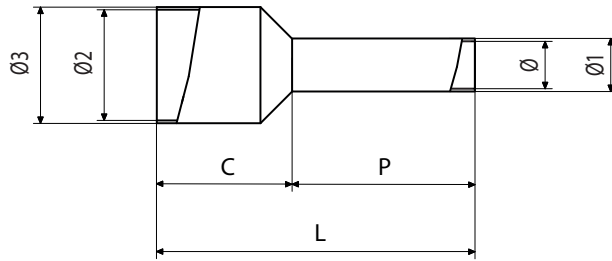

END SLEEVE, PRE-INSULATED WITH PA6, YELLOW, FOR FLEXIBLE COPPER CONDUCTORS, SECTION 70MMQ P=22MM

Technical information

Maximum operating temperature	105 °C
Minimum operating temperature	-20 °C
Cable section range	70±70 mm ²
Colour of jacket	Yellow
Compatible cable class	5 class
Cable stripping length	22 mm
Easy entry	Yes
Dielectric strength of the insulating jacket	16.5 kV/mm
Type	single

Weight and dimensions

Bow external diameter (Ø3)	17.2 mm
Bow internal diameter (Ø2)	16 mm
Tube external diameter (Ø3)	13.5 mm
Tube total length (L)	38 mm
Tube body length (P)	22 mm
Sleeve length (C)	16 mm

Material composition and treatments

Halogen-free	Yes
Insulating jacket material	Polyamide
Conductor body material	Electrolytic copper with purity above 99,95%
Annealed	Yes
Conductor body surface treatment	tin plating
Minimum thickness of conductor body surface treatment	3 µm

Certifications and approvals

REACH	Yes
ROHS	Yes

Logistics

Minimum packaging unit	25
Standard packaging unit	100