


Cable lugs > Pre-insulated > End sleeves

Type: PKE1618

Family: PKE

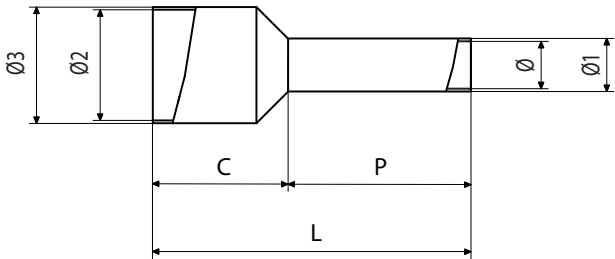

END SLEEVE, PRE-INSULATED WITH PA6, WHITE, FOR FLEXIBLE COPPER CONDUCTORS, SECTION 16MMQ P=18MM

| Technical information                        |            |
|----------------------------------------------|------------|
| Maximum operating temperature                | 105 °C     |
| Minimum operating temperature                | -20 °C     |
| Cable section range                          | 16÷16 mm²  |
| Colour of jacket                             | Ivory      |
| Compatible cable class                       | 5 class    |
| Cable stripping length                       | 18 mm      |
| Easy entry                                   | Yes        |
| Dielectric strength of the insulating jacket | 16.5 kV/mm |
| Type                                         | single     |

| Weight and dimensions       |        |
|-----------------------------|--------|
| Bow external diameter (Ø3)  | 9.6 mm |
| Bow internal diameter (Ø2)  | 8.8 mm |
| Tube external diameter (Ø3) | 6.2 mm |
| Tube total length (L)       | 28 mm  |
| Tube body length (P)        | 18 mm  |
| Sleeve length (C)           | 10 mm  |

| Material composition and treatments |                                              |
|-------------------------------------|----------------------------------------------|
| Halogen-free                        | Yes                                          |
| Insulating jacket material          | Polyamide                                    |
| Conductor body material             | Electrolytic copper with purity above 99,95% |
| Annealed                            | Yes                                          |

| Certifications and approvals |            |
|------------------------------|------------|
| Marks                        | UL (cULus) |
| REACH                        | Yes        |
| ROHS                         | Yes        |

| Logistics               |     |
|-------------------------|-----|
| Minimum packaging unit  | 100 |
| Standard packaging unit | 800 |