


Cable lugs > Pre-insulated > End sleeves

Type: PKE308

Family: PKE

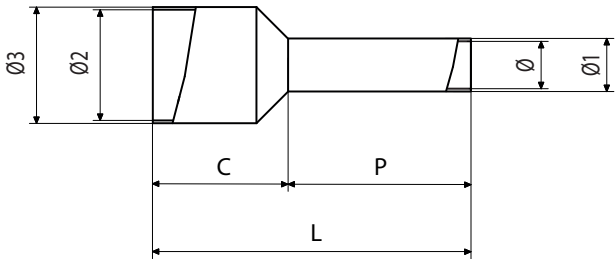

END SLEEVE, PRE-INSULATED WITH PA6, YELLOW, FOR FLEXIBLE COPPER CONDUCTORS,  
SECTION 0,1-0,3MMQ P=8MM

Technical information	
Maximum operating temperature	105 °C
Minimum operating temperature	-20 °C
Cable section range	0.1÷0.3 mm²
Colour of jacket	Yellow
Compatible cable class	5 class
Cable stripping length	8 mm
Easy entry	Yes
Dielectric strength of the insulating jacket	16.5 kV/mm
Type	single

Weight and dimensions	
Bow internal diameter (Ø2)	1.9 mm
Tube external diameter (Ø3)	1.1 mm
Tube total length (L)	12 mm
Tube body length (P)	8 mm
Sleeve length (C)	4 mm

Material composition and treatments	
Halogen-free	Yes
Insulating jacket material	Polyamide
Conductor body material	Electrolytic copper with purity above 99,95%
Annealed	Yes
Conductor body surface treatment	tin plating
Minimum thickness of conductor body surface treatment	3 µm

Certifications and approvals	
REACH	Yes
ROHS	Yes

Logistics	
Minimum packaging unit	500
Standard packaging unit	20000