


Cable lugs > Pre-insulated > End sleeves

Type: PKT1014

Family: PKT

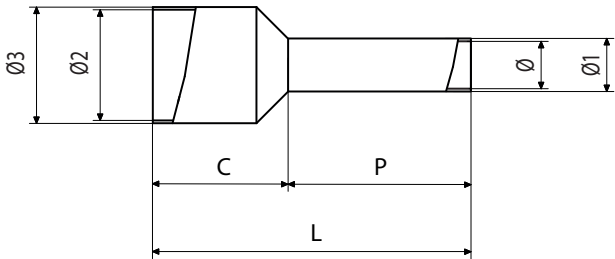

TWIN END SLEEVE, PRE-INSULATED WITH PA6, RED, FOR FLEXIBLE COPPER CONDUCTORS, SECTION 2X10MMQ P=12MM

Technical information	
Maximum operating temperature	105 °C
Minimum operating temperature	-20 °C
Cable section range	10÷10 mm <sup>2</sup>
Colour of jacket	Red
Cable stripping length	12 mm
Number of cables that can be introduced	2
Easy entry	Yes
Dielectric strength of the insulating jacket	16.5 kV/mm
Type	single

Weight and dimensions	
Bow internal diameter (Ø2)	7.5 mm
Tube external diameter (Ø3)	6.2 mm
Tube total length (L)	24 mm
Internal width of sleeve	13.3 mm
Tube body length (P)	12 mm
Sleeve length (C)	12 mm

Material composition and treatments	
Halogen-free	Yes
Insulating jacket material	Polyamide
Conductor body material	Electrolytic copper with purity above 99,95%
Annealed	Yes
Conductor body surface treatment	tin plating
Minimum thickness of conductor body surface treatment	3 µm

Certifications and approvals	
Reference standards	DIN 46228/4
REACH	Yes
ROHS	Yes

Logistics	
Minimum packaging unit	50
Standard packaging unit	500