


Cable lugs > Pre-insulated > End sleeves

Type: PKT7508

Family: PKT

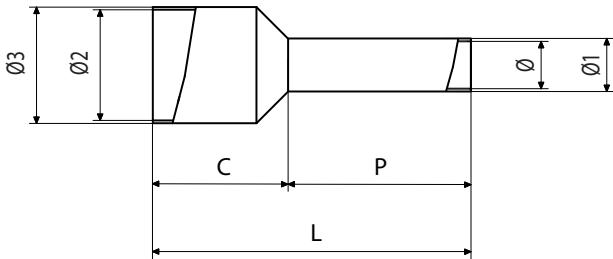

TWIN END SLEEVE, PRE-INSULATED WITH PA6, GREY, FOR FLEXIBLE COPPER CONDUCTORS, SECTION 2X0,75MMQ P=8MM

Technical information	
Maximum operating temperature	105 °C
Minimum operating temperature	-20 °C
Cable section range	0.75÷0.75 mm²
Colour of jacket	Grey
Cable stripping length	12 mm
Number of cables that can be introduced	2
Easy entry	Yes
Dielectric strength of the insulating jacket	16.5 kV/mm
Type	single

Weight and dimensions	
Bow internal diameter (Ø2)	2.8 mm
Tube external diameter (Ø3)	2.1 mm
Tube total length (L)	15 mm
Internal width of sleeve	5 mm
Tube body length (P)	8 mm
Sleeve length (C)	7 mm

Material composition and treatments	
Halogen-free	Yes
Insulating jacket material	Polyamide
Conductor body material	Electrolytic copper with purity above 99,95%
Annealed	Yes

Certifications and approvals	
Marks	UL (cULus)
Reference standards	DIN 46228/4
REACH	Yes
ROHS	Yes

Logistics	
Minimum packaging unit	100
Standard packaging unit	2500