


Cable lugs > Pre-insulated > Cable terminals

Type: RF-F608

Family: F-F

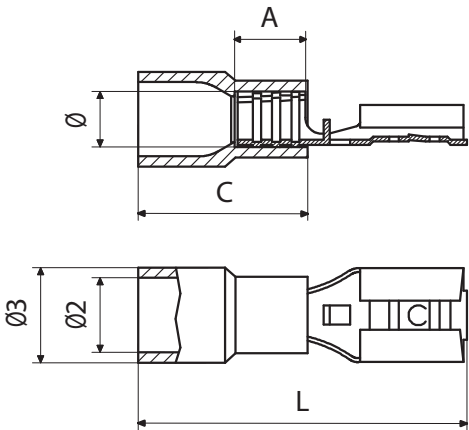

FEMALE DISCONNECT TERMINAL, PRE-INSULATED WITH PC, RED, FOR COPPER CODUCTORS, HALOGEN FREE, SECTION 0,25-1,5 MMQ

Technical information	
Maximum operating temperature	115 °C
Minimum operating temperature	-20 °C
Cable section range	0.25÷1.5 mm²
Colour of jacket	Red
Cable stripping length	5.2 mm
Presence of reinforcement ring	Yes
Easy entry	Yes
Anti-vibration	No
Type	single
Coupling type	Female
Insulation type	partial

Weight and dimensions	
Bow external diameter (Ø3)	5.5 mm
Barrel internal diameter (Ø)	2.8 mm
Bow internal diameter (Ø2)	4 mm
Tongue width	6.8 mm
Barrel length (A)	4.7 mm
Sleeve length (C)	10.5 mm
Tongue length	7.8 mm
Total connector length (L)	22.2 mm

Material composition and treatments	
Halogen-free	Yes
Insulating jacket material	Polycarbonate
Reinforcing ring material	Copper
Conductor body material	brass
Annealed	No

Certifications and approvals	
Marks	UL (cULus)
UL 94 self-extinguishing class	V0
Reference standards	CAN/CSA C22.2 No. 153-14;UL 310
REACH	Yes
ROHS	Yes

Logistics	
Minimum packaging unit	100
Standard packaging unit	2000