


Cable lugs > Pre-insulated > Cable terminals

Type: RF-M10

Family: F-M

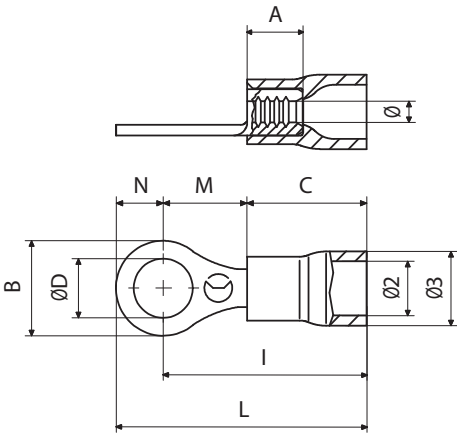

RING TERMINAL, PRE-INSULATED WITH PVC, RED, FOR COPPER CONDUCTORS, SCREW 10MM
SECTION 0,25-1,5 MMQ

| Technical information | |
|--------------------------------|--------------|
| Maximum operating temperature | 75 °C |
| Minimum operating temperature | -20 °C |
| Cable section range | 0.25÷1.5 mm² |
| Colour of jacket | Red |
| Cable stripping length | 4.6 mm |
| Number of tab holes | 1 |
| Presence of reinforcement ring | No |
| Presence of sight hole | No |
| Easy entry | Yes |
| Anti-vibration | No |
| Type | single |
| Insulation type | partial |

| Weight and dimensions | |
|--|----------|
| Eyelet diameter (ØD) | 10.5 mm |
| Bow external diameter (Ø3) | 5.5 mm |
| Barrel internal diameter (Ø) | 1.8 mm |
| Bow internal diameter (Ø2) | 4 mm |
| Screw diameter | M10 |
| Distance between center of tab hole - external barrel side (I) | 17.25 mm |
| Distance between center of tab hole - external eyelet side (N) | 7.75 mm |
| Distance between center of tab hole - point of transition (M) | 13.05 mm |

| Weight and dimensions | |
|----------------------------|---------|
| Hole spacing (E) | 0 mm |
| Patella width (B) | 15.5 mm |
| Barrel length (A) | 4.2 mm |
| Sleeve length (C) | 10.1 mm |
| Total connector length (L) | 30.8 mm |

| Material composition and treatments | |
|-------------------------------------|--|
| Halogen-free | No |
| Insulating jacket material | Polyvinylchloride PVC |
| Conductor body material | Electrolytic copper with purity above 99,95% |
| Annealed | Yes |

| Certifications and approvals | |
|--------------------------------|----------------------|
| Marks | UL (cULus) |
| UL 94 self-extinguishing class | V0 |
| Reference standards | UL 486A-486B;UL 486C |
| REACH | Yes |
| ROHS | Yes |

| Logistics | |
|-------------------------|------|
| Minimum packaging unit | 100 |
| Standard packaging unit | 1500 |