


Cable lugs > Pre-insulated > Cable terminals

Type: RF-PP16/23

Family: F-PP

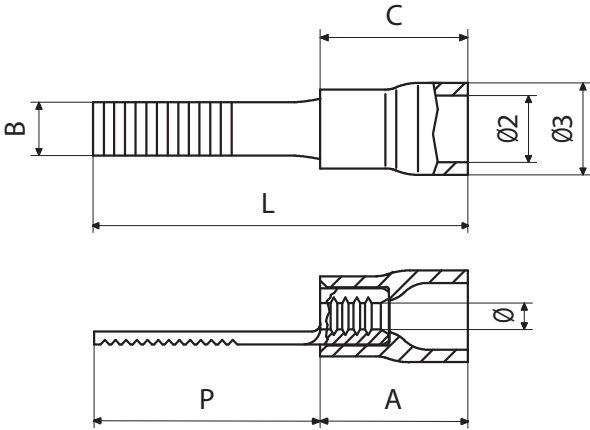

FLAT PIN TERMINAL, PRE-INSULATED WITH PVC, RED, FOR COPPER CONDUCTORS, P=17,2X2,3 SECTION 0,25-1,5 MMQ

| Technical information          |              |
|--------------------------------|--------------|
| Maximum operating temperature  | 75 °C        |
| Minimum operating temperature  | -20 °C       |
| Cable section range            | 0.25÷1.5 mm² |
| Colour of jacket               | Red          |
| Cable stripping length         | 4.6 mm       |
| Presence of reinforcement ring | No           |
| Easy entry                     | Yes          |
| Anti-vibration                 | No           |
| Type                           | single       |
| Insulation type                | partial      |
| Tip type                       | blade        |

| Weight and dimensions        |         |
|------------------------------|---------|
| Bow external diameter (Ø3)   | 5.5 mm  |
| Barrel internal diameter (Ø) | 1.8 mm  |
| Bow internal diameter (Ø2)   | 4 mm    |
| Tip width (B)                | 2.3 mm  |
| Barrel length (A)            | 4.2 mm  |
| Tip length (P)               | 17.2 mm |
| Sleeve length (C)            | 10.1 mm |

| Weight and dimensions      |         |
|----------------------------|---------|
| Total connector length (L) | 27.2 mm |

| Material composition and treatments |                                              |
|-------------------------------------|----------------------------------------------|
| Halogen-free                        | No                                           |
| Insulating jacket material          | Polyvinylchloride PVC                        |
| Conductor body material             | Electrolytic copper with purity above 99,95% |
| Annealed                            | Yes                                          |

| Certifications and approvals   |                      |
|--------------------------------|----------------------|
| Marks                          | UL (cULus)           |
| UL 94 self-extinguishing class | V0                   |
| Reference standards            | UL 486A-486B;UL 486C |
| REACH                          | Yes                  |
| ROHS                           | Yes                  |

| Logistics               |      |
|-------------------------|------|
| Minimum packaging unit  | 100  |
| Standard packaging unit | 2500 |