


Cable lugs > Terminal blocks and distribution blocks > Terminal blocks

Type: TBP1.5

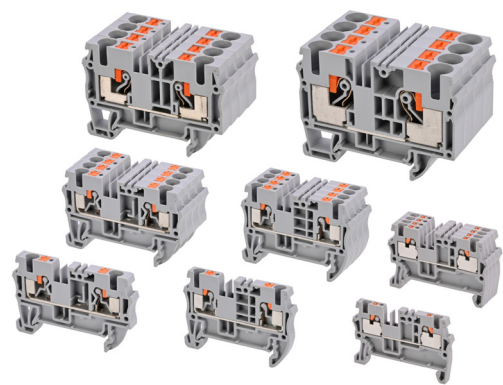

MODULAR TERMINALS, WITH PUSH-IN CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Max voltage (UL 1059)	600 V
Max voltage AC/DC (IEC EN 60947-7-1)	1000 V
Max current with nominal cross section (IEC EN 60947-7-1)	17.5 A
Rated surge voltage	8 kV
Max current with nominal cross section (UL 1059)	15 A
Range of cable cross section	1.5÷1.5 mm²
Conductor section solid	0.08÷2.5 mm²
Conductor section flexible	0.14÷1.5 mm²
Number of connections	2
Number of connections per level	2
Number of levels	1
Bridges	SL3.5-2; SL3.5-3; SL3.5-4; SL3.5-5; SL3.5-6; SL3.5-10
Clamping type	undirect
Captive screw	Yes
Cable stripping length	10 mm
Wire termination technology	Push in
Overvoltage category	III
Degree of pollution	3
Open side panel	Yes
Color	Grey

Technical information	
Resistance to removal from DIN rail	1 N
Weight and dimensions	
Height	30.5 mm
Width	3.5 mm
Length	47.2 mm
Height with NS 35/15	39.8 mm
Height with NS 35/7,5	32.3 mm
Internal cylindrical gauge	A1/B1
Material composition and treatments	
Conductor body material	SS
Insulated body material	Polyamide PA6.6
Certifications and approvals	
Marks	CE; RINA; UKCA; UL (cURus)
UL standard	1059
Logistics	
Minimum packing unit	100
Standard packing unit	3000