


Cable lugs > Terminal blocks and distribution blocks > Terminal blocks

Type: TBPG10

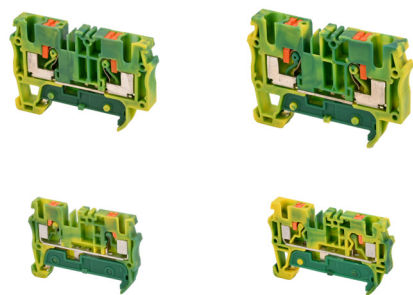

MODULAR TERMINALS FOR GROUND NETWORKS, WITH PUSH-IN CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Range of cable cross section	10÷10 mm²
Conductor section solid	0.5÷16 mm²
Conductor section flexible	0.5÷10 mm²
Number of connections	2
Number of connections per level	2
Number of levels	1
Bridges	SL10-2; SL10-3; SL10-4; SL10-5
Clamping type	undirect
Captive screw	Yes
Cable stripping length	16 mm
Wire termination technology	Push in
Color	Yellow/green

Weight and dimensions	
Height	49.5 mm

Weight and dimensions	
Width	10 mm
Length	70.2 mm
Internal cylindrical gauge	A6/B6

Material composition and treatments	
Conductor body material	CRCA
Insulated body material	Polyamide PA6.6

Certifications and approvals	
Marks	CE; RINA; UKCA; UL (cURus)
UL standard	1059

Logistics	
Minimum packing unit	50
Standard packing unit	400