


Cable lugs > Terminal blocks and distribution blocks > Terminal blocks

Type: TBPG2.5X1-2

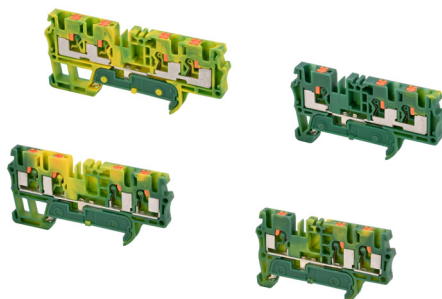

MODULAR TERMINALS MULTICONDUCTOR FOR GROUND NETWORKS, WITH PUSH-IN CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Range of cable cross section	2.5÷2.5 mm ²
Conductor section solid	0.08÷4 mm ²
Conductor section flexible	0.08÷2.5 mm ²
Number of connections	3
Number of connections per level	3
Number of levels	1
Bridges	SL5-2; SL5-3; SL5-4; SL5-5; SL5-6; SL5-10
Clamping type	undirect
Captive screw	Yes
Cable stripping length	8 mm
Wire termination technology	Push in
Overvoltage category	III
Open side panel	Yes
Color	Yellow/green
Resistance to removal from DIN rail	1 N

Weight and dimensions	
Height	36 mm
Width	5 mm
Length	62.5 mm
Height with NS 35/15	44.4 mm
Height with NS 35/7,5	36.9 mm
Internal cylindrical gauge	A2

Material composition and treatments	
Conductor body material	SS
Insulated body material	Polyamide PA6.6

Certifications and approvals	
Marks	CE; RINA; UKCA; UL (cURus)
UL standard	1059

Logistics	
Minimum packing unit	100
Standard packing unit	1100