


Type: TBPG6

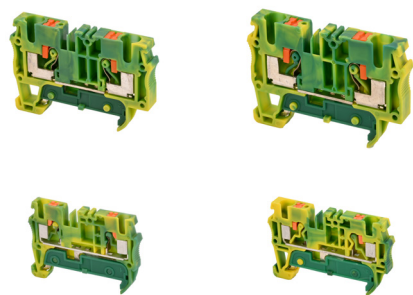

MODULAR TERMINALS FOR GROUND NETWORKS, WITH PUSH-IN CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Range of cable cross section	6÷6 mm²
Conductor section solid	0.2÷10 mm²
Conductor section flexible	0.2÷6 mm²
Number of connections	2
Number of connections per level	2
Number of levels	1
Bridges	SL8/1-2; SL8/1-3 ; SL8/1-4; SL8/1-5; SL8/1-10
Clamping type	undirect
Captive screw	Yes
Cable stripping length	10 mm
Wire termination technology	Push in
Overvoltage category	III
Open side panel	Yes
Color	Yellow/green
Resistance to removal from DIN rail	5 N

Weight and dimensions	
Height	42.9 mm
Width	8 mm
Length	64.2 mm
Height with NS 35/15	51.3 mm
Height with NS 35/7,5	43.8 mm
Internal cylindrical gauge	A5

Material composition and treatments	
Conductor body material	CRCA
Insulated body material	Polyamide PA6.6

Certifications and approvals	
Marks	CE; RINA; UKCA; UL (cURus)
UL standard	1059

Logistics	
Minimum packing unit	50
Standard packing unit	700