


Type: TBS2.5-L2

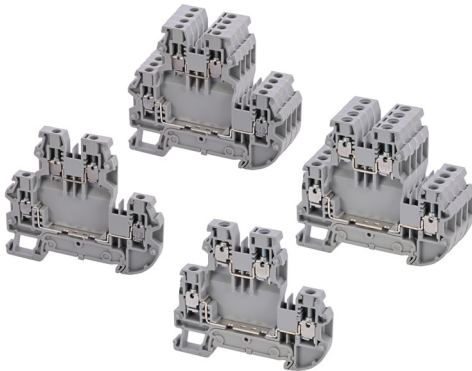

TWO LEVEL MODULAR TERMINALS, WITH SCREW CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Max voltage (UL 1059)	300 V
Max voltage AC/DC (IEC EN 60947-7-1)	500 V
Max current with nominal cross section (IEC EN 60947-7-1)	24 A
Rated surge voltage	6 kV
Range of cable cross section	0.08÷2.5 mm²
Conductor section solid	0.14÷4 mm²
Conductor section flexible	0.14÷2.5 mm²
Number of connections	4
Number of connections per level	2
Number of levels	2
Bridges	SL5-2; SL5-3; SL5-4; SL5-5; SL5-6; SL5-10
Clamping type	undirect
Captive screw	Yes
Tightening torque	0.4 Nm
Screw pitch	M2,6
Cable stripping length	8 mm
Wire termination technology	A vite
Overvoltage category	III
Degree of pollution	3
Open side panel	Yes

Technical information	
Color	Grey
Resistance to removal from DIN rail	1 N
Weight and dimensions	
Height	62.5 mm
Width	5 mm
Length	71 mm
Height with NS 35/7,5	63 mm
Internal cylindrical gauge	A2
Material composition and treatments	
Conductor body material	CRCA
Insulated body material	Polyamide PA6.6
Certifications and approvals	
Marks	CE; RINA; UKCA; UL (cURus)
UL standard	1059
Logistics	
Minimum packing unit	100
Standard packing unit	600