


Type: TBS2.5D

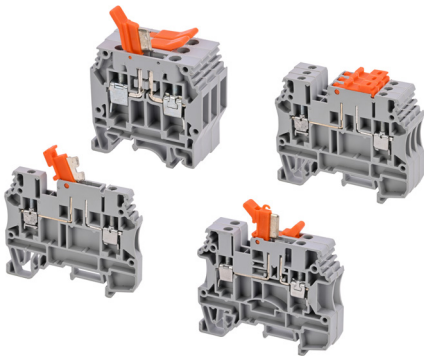

DISCONNECT MODULAR TERMINALS, WITH SCREW CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Max voltage AC/DC (IEC EN 60947-7-1)	1000 V
Max current with nominal cross section (IEC EN 60947-7-1)	24 A
Rated surge voltage	6 kV
Conductor section solid	0.5÷4 mm²
Conductor section flexible	0.5÷2.5 mm²
Number of connections	2
Number of connections per level	2
Number of levels	1
Bridges	SL5-2 ;SL5-3 ;SL5-4 ;SL5-5 ;SL5-6 ;SL5-10
Clamping type	undirect
Captive screw	Yes
Tightening torque	0.4 Nm
Screw pitch	M2.6
Cable stripping length	10 mm
Degree of pollution	3
Color	Grey

Weight and dimensions	
Height	50.5 mm
Width	6 mm
Length	62 mm
Internal cylindrical gauge	A3

Material composition and treatments	
Conductor body material	CRCA
Insulated body material	Polyamide PA6.6

Certifications and approvals	
Marks	CE; RINA; UKCA
UL standard	1059

Logistics	
Minimum packing unit	100
Standard packing unit	1000