


Type: TBS95

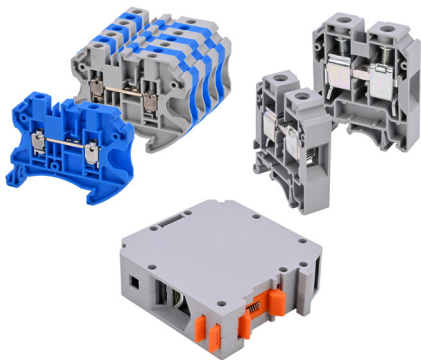

MODULAR TERMINAL, WITH SCREW CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Max voltage (UL 1059)	600 V
Max voltage AC/DC (IEC EN 60947-7-1)	1000 V
Max current with nominal cross section (IEC EN 60947-7-1)	232 A
Rated surge voltage	8 kV
Conductor section solid	25÷120 mm²
Conductor section flexible	25÷95 mm²
Number of connections	2
Number of connections per level	2
Number of levels	1
Clamping type	undirect
Captive screw	Yes
Tightening torque	20 Nm
Screw pitch	M8
Cable stripping length	33 mm
Wire termination technology	A vite
Degree of pollution	3
Color	Grey

Weight and dimensions	
Height	90.2 mm
Width	25 mm
Length	83 mm
Internal cylindrical gauge	A12/B12

Material composition and treatments	
Conductor body material	CRCA
Insulated body material	Polyamide PA6.6

Certifications and approvals	
Marks	CE; RINA; UKCA; UL (cURus)
UL standard	1059

Logistics	
Minimum packing unit	10
Standard packing unit	60