


Cable lugs > Terminal blocks and distribution blocks > Terminal blocks

Type: TBSG16

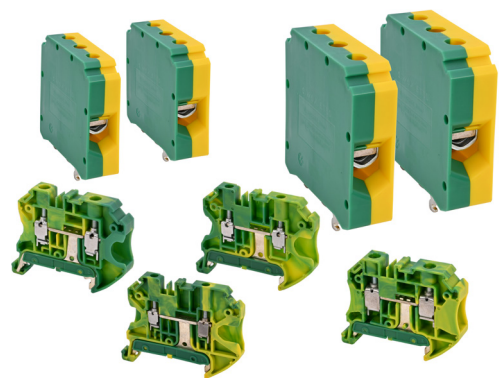

MODULAR TERMINALS FOR GROUND NETWORKS, WITH SCREW CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Rated surge voltage	8 kV
Conductor section solid	6÷25 mm²
Conductor section flexible	6÷16 mm²
Number of connections	2
Number of connections per level	2
Number of levels	1
Clamping type	undirect
Captive screw	Yes
Tightening torque	1.2 Nm
Screw pitch	M4
Cable stripping length	13 mm
Wire termination technology	A vite
Degree of pollution	3
Color	Yellow/green

Weight and dimensions	
Height	51.3 mm
Width	12 mm
Length	45 mm
Internal cylindrical gauge	A7

Material composition and treatments	
Conductor body material	CRCA
Insulated body material	Polyamide PA6.6

Certifications and approvals	
Marks	CE; RINA; UKCA; UL (cURus)
UL standard	1059

Logistics	
Minimum packing unit	50
Standard packing unit	300