


Cable lugs > Terminal blocks and distribution blocks > Terminal blocks

Type: TBSG35

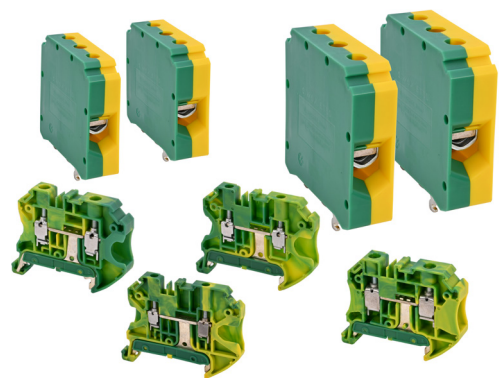

MODULAR TERMINALS FOR GROUND NETWORKS, WITH SCREW CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Rated surge voltage	8 kV
Conductor section solid	6÷35 mm²
Conductor section flexible	6÷35 mm²
Number of connections	2
Number of connections per level	2
Number of levels	1
Clamping type	undirect
Captive screw	Yes
Tightening torque	3 Nm
Screw pitch	M6
Cable stripping length	17 mm
Wire termination technology	A vite
Degree of pollution	3
Color	Yellow/green

Weight and dimensions	
Height	63.2 mm
Width	16.5 mm
Length	58 mm
Internal cylindrical gauge	A9/B9

Material composition and treatments	
Conductor body material	CRCA
Insulated body material	Polyamide PA6.6

Certifications and approvals	
Marks	CE; RINA; UKCA; UL (cURus)
UL standard	1059

Logistics	
Minimum packing unit	20
Standard packing unit	120