


Cable lugs > Terminal blocks and distribution blocks > Terminal blocks

Type: TBSG50

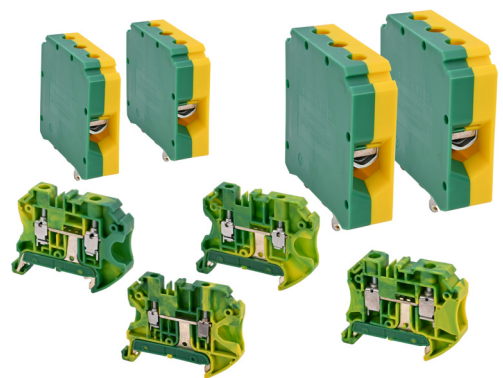

MODULAR TERMINALS FOR GROUND NETWORKS, WITH SCREW CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Rated surge voltage	8 kV
Conductor section solid	16÷50 mm²
Conductor section flexible	16÷50 mm²
Number of connections	2
Number of connections per level	2
Number of levels	1
Clamping type	undirect
Captive screw	Yes
Tightening torque	8 Nm
Screw pitch	M6
Cable stripping length	20 mm
Degree of pollution	3
Color	Yellow/green

Weight and dimensions	
Height	75.8 mm
Width	20.5 mm
Length	71 mm
Internal cylindrical gauge	A10/B10

Material composition and treatments	
Conductor body material	CRCA
Insulated body material	Polyamide PA6.6

Certifications and approvals	
Marks	CE; RINA; UKCA
UL standard	1059

Logistics	
Minimum packing unit	10
Standard packing unit	70