


Cable glands > Plastic > IP68 cable glands

Type: 1941E.M40

Family: 1940 M

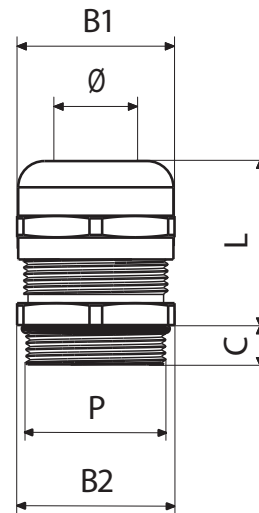

MAXIBLOCK CABLE GLAND, IN POLYAMIDE PA6.6, WITH EXTENDED CLAMPING RANGE, M40X1,5, IP68, GREY RAL 7035

Technical info

Range of operating temperature (static)	-40÷100 °C
Range of operating temperature (dynamic)	-20÷90 °C
Color	Grey
Thread pitch	M40x1.5
Counter nut	No
External seal	Yes
Internal washers	No
Tightening torque	8 Nm
Range of length of total entry bush dimensions (L)	42÷49 mm

Weight and dimensions

Spanner size for tightening the entry bush (B1)	53 mm
Spanner size for tightening the body (B2)	53 mm
Fixing hole diameter	40.5 mm
Width	58.5 mm
Length of the thread on the side of the insertion into the panel (C)	18 mm
Range of cable housing diameter	22÷32 mm

Material treatment and composition

Body material	Polyamide PA6.6
Entry bush material	Polyamide PA6.6
Outer seal material	Neoprene
Inner seal material	Neoprene
Halogen free	No

Certifications and approvals

Marks	CE; UKCA; VDE
Ingress Protection IP according to CEI EN 60529	IP68
Reference standard	CEI EN 60423; CEI EN 62444
UV resistance according to EN ISO 4892-2	Yes
UL impact rating	3 IK
Type NEMA	1 (NEMA);
Compliance according to CEI EN 62444	Yes

Logistics

Minimum unit quantity	10
Standard unit quantity	10