


Cable lugs > Terminal blocks and distribution blocks > Terminal blocks

Type: TBSG10

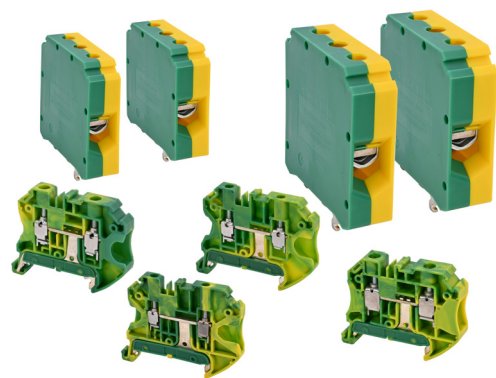

MODULAR TERMINALS FOR GROUND NETWORKS, WITH SCREW CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Conductor section solid	0.5÷16 mm²
Conductor section flexible	0.5÷10 mm²
Number of connections	2
Number of connections per level	2
Number of levels	1
Bridges	SL8-2; SL8-3; SL8-4; SL8-5
Clamping type	undirect
Captive screw	Yes
Tightening torque	1.2 Nm
Screw pitch	M4
Cable stripping length	10 mm
Wire termination technology	A vite
Overvoltage category	III
Open side panel	No
Color	Yellow/green
Resistance to removal from DIN rail	5 N

Weight and dimensions	
Height	45.5 mm
Width	10 mm
Length	58.9 mm
Height with NS 35/15	53.4 mm
Height with NS 35/7,5	45.9 mm
Internal cylindrical gauge	A6/B6

Material composition and treatments	
Conductor body material	CRCA
Insulated body material	Polyamide PA6.6

Certifications and approvals	
Marks	CE; RINA; UKCA; UL (cURus)
UL standard	1059

Logistics	
Minimum packing unit	50
Standard packing unit	550