


Cable lugs > Terminal blocks and distribution blocks > Terminal blocks

Type: TBSG2.5

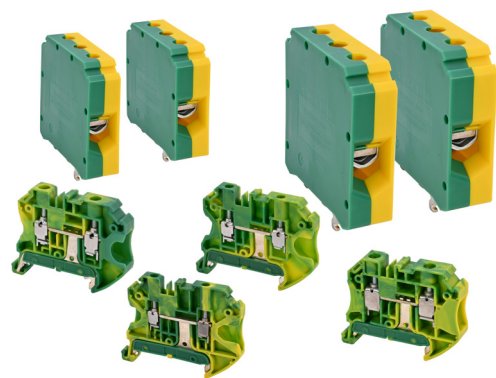

MODULAR TERMINALS FOR GROUND NETWORKS, WITH SCREW CLAMP

Technical information	
Maximum operating temperature	130 °C
Minimum operating temperature	-60 °C
Conductor section solid	0.14÷4 mm²
Conductor section flexible	0.14÷2.5 mm²
Number of connections	2
Number of connections per level	2
Number of levels	1
Bridges	SL5-2 ;SL5-3 ;SL5-4 ;SL5-5 ;SL5-6 ;SL5-10
Clamping type	undirect
Captive screw	Yes
Tightening torque	0.4 Nm
Screw pitch	M2.6
Cable stripping length	8 mm
Wire termination technology	A vite
Overvoltage category	III
Open side panel	Yes
Color	Yellow/green
Resistance to removal from DIN rail	1 N

Weight and dimensions	
Height	45.5 mm
Width	5 mm
Length	58.9 mm
Height with NS 35/15	53.4 mm
Height with NS 35/7,5	45.9 mm
Internal cylindrical gauge	A3/B3

Material composition and treatments	
Conductor body material	CRCA
Insulated body material	Polyamide PA6.6

Certifications and approvals	
Marks	CE; RINA; UKCA; UL (cURus)
UL standard	1059

Logistics	
Minimum packing unit	100
Standard packing unit	1100